

# L I A V e r i f i e d S c h e d u l e o f C e r t i f i c a t i o n



**Schedule No.** : TSD004-0062 (Issue 1)  
**Certificate No.** : 004-0062  
**Certificate Holder:** : Lumilife Limited  
1st Floor Channel House  
Green Street  
Jersey  
JE2 4UH  
**Web:** : [www.lumilife.net](http://www.lumilife.net)  
**Date of Initial Registration** : 06/06/2018  
**Date of Issue** : 06/06/2018  
**Date of Expiry** : 05/06/2021

**LUMILIFE**

**This Schedule is to be read in conjunction with the accompanying certificate. The data shown relates only to the unit(s) tested. This schedule and any subsequent schedule(s) may not be reproduced except in full without the written approval of the Testing Laboratory.**

Registered Office: Stafford Park 7, Telford, Shropshire, TF3 3BQ, United Kingdom  
Tel: +44 (0) 1952 290907 Fax: +44 (0) 1952 290908 Email: [lab@thelia.org.uk](mailto:lab@thelia.org.uk)  
Web: [www.lialab.org.uk](http://www.lialab.org.uk)  
Web: [www.lialabcert.org.uk](http://www.lialabcert.org.uk)



## Contents

<b>1. INTRODUCTION</b>	3
<b>2. CERTIFICATION STATUS</b>	3
<b>3. SCOPE</b>	3
<b>4. DOCUMENTATION</b>	4
<b>5. OBSERVATIONS AND LIMITATIONS</b>	4
<b>APPENDIX A</b>	5
<b>A.1. IP65 Highbay 200W</b>	6
A.1.1. PRODUCT DETAILS	6
A.1.2. SAFETY EVALUATION	7
A.1.3. CENTRE BEAM INTENSITY AND BEAM ANGLE	8
A.1.4. COLORIMETRY	9
A.1.5. LIFE TEST	11
<b>A.2. IP65 Highbay 150W</b>	12
A.2.1. PRODUCT DETAILS	12
A.2.2. SAFETY EVALUATION	13
A.2.3. CENTRE BEAM INTENSITY AND BEAM ANGLE	14
A.2.4. COLORIMETRY	15
A.2.5. LIFE TEST	17
<b>A.3. IP65 Highbay 100W</b>	18
A.3.1. PRODUCT DETAILS	18
A.3.2. SAFETY EVALUATION	19
A.3.3. CENTRE BEAM INTENSITY AND BEAM ANGLE	20
A.3.4. COLORIMETRY	21
A.3.5. LIFE TEST	23



## 1. INTRODUCTION

This Schedule of certification accompanies the certificate identified on page one as part of the LIA Verified scheme for LED products. Assessment is carried out in line with the requirements set out in LIA Laboratories Technical Scheme Document TSD-004.

## 2. CERTIFICATION STATUS

Provisional - The products have passed the safety assessment and have achieved 100 hours of operation as required by the scheme.

## 3. SCOPE

The products listed in Table 1, supplied by the certificate holder identified on page one have been assessed and are covered under certificate no. 004-0062.

**Table 1. *Products covered under scope***

<b>Model No.</b>	<b>Product Name</b>
HB-200D-CIR	IP65 Highbay 200W
HB-150D-CIR-V2	IP65 Highbay 150W
HB-100D-CIR	IP65 Highbay 100W



#### 4. DOCUMENTATION

As part of the assessment process the following documents have been evaluated and form part of the Technical File held by the certificate holder and LIA Laboratories Ltd. It should be noted that in order to maintain certification the certificate holder is required to maintain up to date technical documentation related to all of the products identified in section three of this schedule.

All client documentation held by LIA Laboratories Ltd is maintained as strictly confidential.

**Table 2. Critical Documents**

Document reference	Title/Description
DE 2-020496-M1	CB Safety Test Certificate
17057146 002	CB Safety Test Report
LCS1608231921E	EMC Test Report
LSC1609191166S	IES TM-21-22 Test Report
LCS1608231920S	Safety Test Report
D001	Instruction Manual
PV184 Interim Report	LIA Test Report

#### 5. OBSERVATIONS AND LIMITATIONS

When installed in accordance with the manufacturer's instructions, this product is deemed to comply with the specified end use.



# **APPENDIX A**

# **PRODUCT TECHNICAL SPECIFICATIONS**

## A.1. IP65 Highbay 200W


### A.1.1. PRODUCT DETAILS

**Table A.1 Product Specifications**

Product Name	IP65 Highbay 200W
Model No.	HB-200D-CIR
Product Description	LED Highbay
Nominal Dimensions	Ø – 292mm; H – 205.5mm
Product Supply Requirement	220-240V AC, 50/60Hz
Lamp Type and Power	LED, 200W



**Figure 1. Product Images**

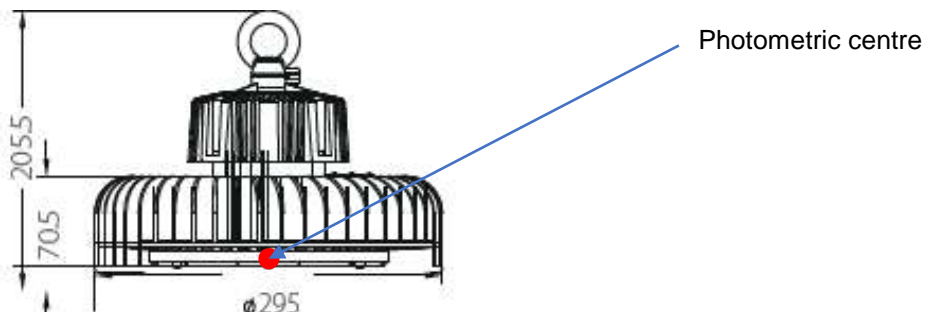

**Figure 2. Product diagram**

## A.1.2. SAFETY EVALUATION

Safety assessment was carried out in accordance with the requirements set in LIA Laboratories' technical scheme document TSD-004, the clauses verified are shown in Table 2 and have been evaluated against IEC 60598-1:2014 and IEC 60598-2-1:1979+AMD1:1987.

The product has been found to conform to the requirements laid out in the identified clauses.

**Table A.2 Safety Test Results**

Clause No.	Title
1.5	Marking
1.6	Construction
1.7	Creepage Distances and Clearances
1.8	Provision for Earthing
1.9	Terminals
1.10	External and Internal Wiring
1.11	Protection against Electric Shock
1.12	Endurance Tests and Thermal Tests
1.13	Resistance to Dust and Moisture – IP65
1.14	Insulation Resistance and Electric Strength
1.15	Resistance to Heat, Fire and Tracking

### A.1.3. CENTRE BEAM INTENSITY AND BEAM ANGLE

Table A.3 *Beam Angle value for model HB-200D-CIR*

Centre Beam Intensity (cd)	Beam Angle (Lamp orientation)	Beam Angle Result (°)
9028	0° - 180°	113.6
	90° - 270°	113.5

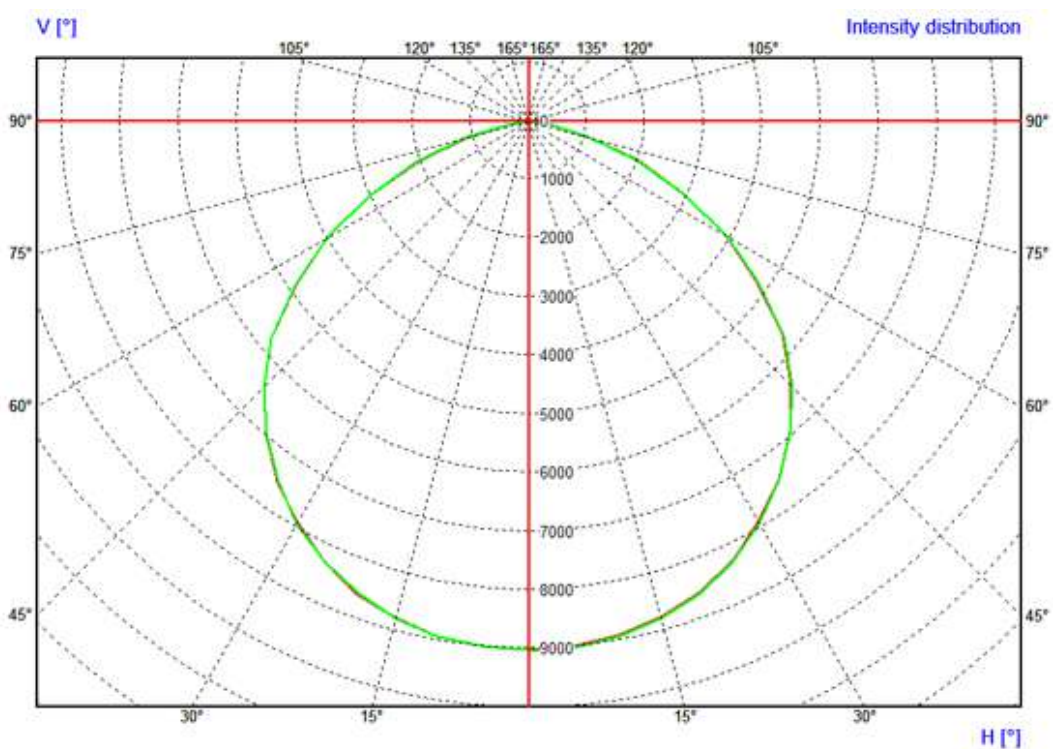


Figure 3. *Polar Diagram for model HB-200D-CIR*





#### A.1.4. COLORIMETRY

Table A.4 Colorimetry values for model HB-200D-CIR

<b>COLORIMETRY &amp; LUMINOUS FLUX</b>	x coordinate	0.3253
	y coordinate	0.3411
	u' coordinate	0.2020
	v' coordinate	0.4765
	Correlated Colour Temperature (K)	5821
	Ra (%)	84
	R1 (%)	83
	R2 (%)	92
	R3 (%)	94
	R4 (%)	80
	R5 (%)	82
	R6 (%)	86
	R7 (%)	87
	R8 (%)	69
	R9 (%)	15
	R10 (%)	79
	R11 (%)	79
R12 (%)	58	
R13 (%)	86	
R14 (%)	97	
Lumen Output (lm)	25390	

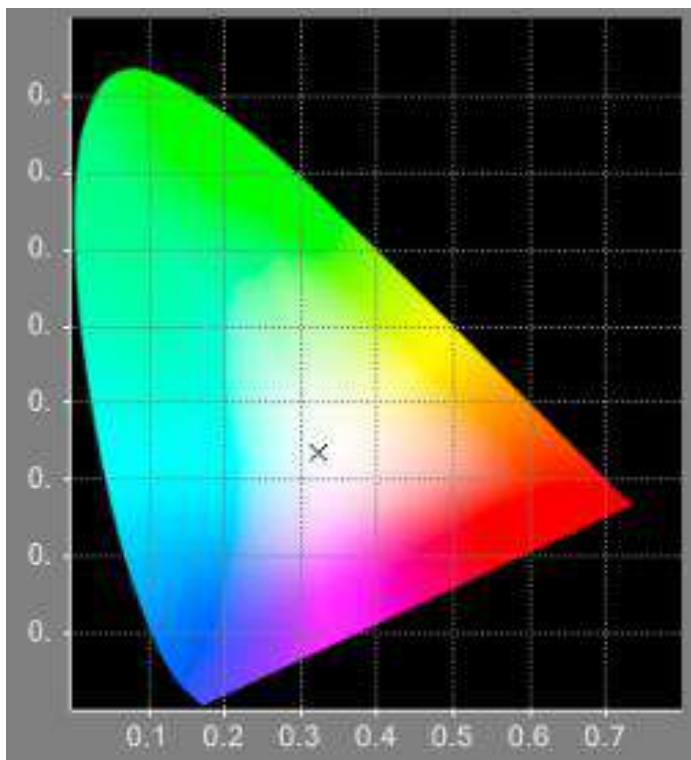


Figure 4. CIE 1931 diagram for model HB-200D-CIR


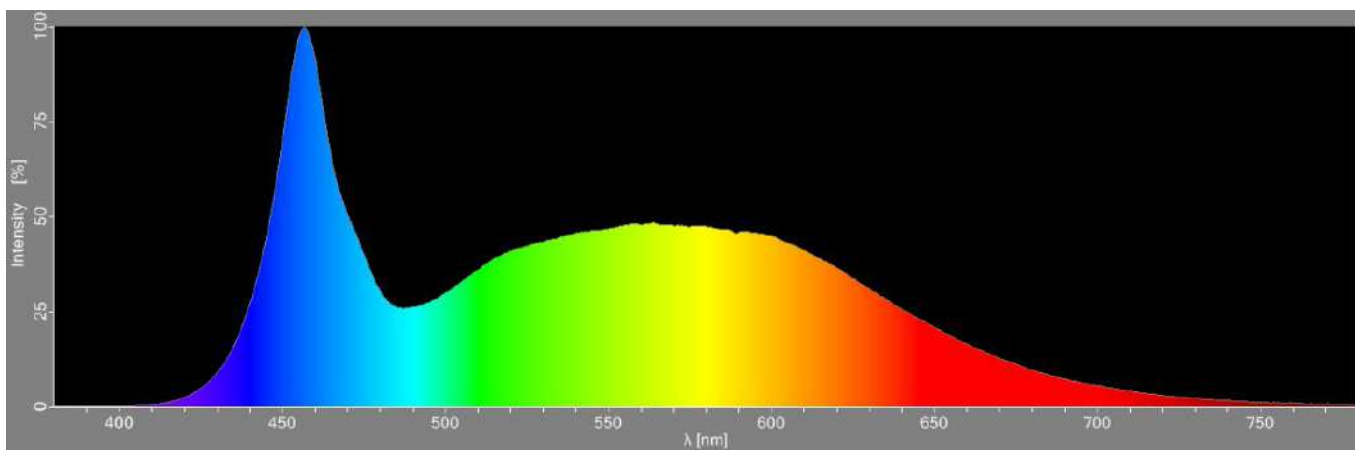


Figure 5. Spectral Flux for model HB-200D-CIR

### A.1.5. LIFE TEST

**Table A.5 Colorimetry depreciation of model HB-200D-CIR**

Measured Value	0 hours	100 hours	% Maintained (0-100hrs)	2000 hours	% Maintained (0-2000hrs)
Correlated Colour Temperature (K)	5821	5821	100.0	TBC	TBC
Ra (%)	84	84	100.0	TBC	TBC
Luminous Flux (lm)	25390	25400	100.0	TBC	TBC
Luminous Efficacy (lm/W)	132	132	100.0	TBC	TBC

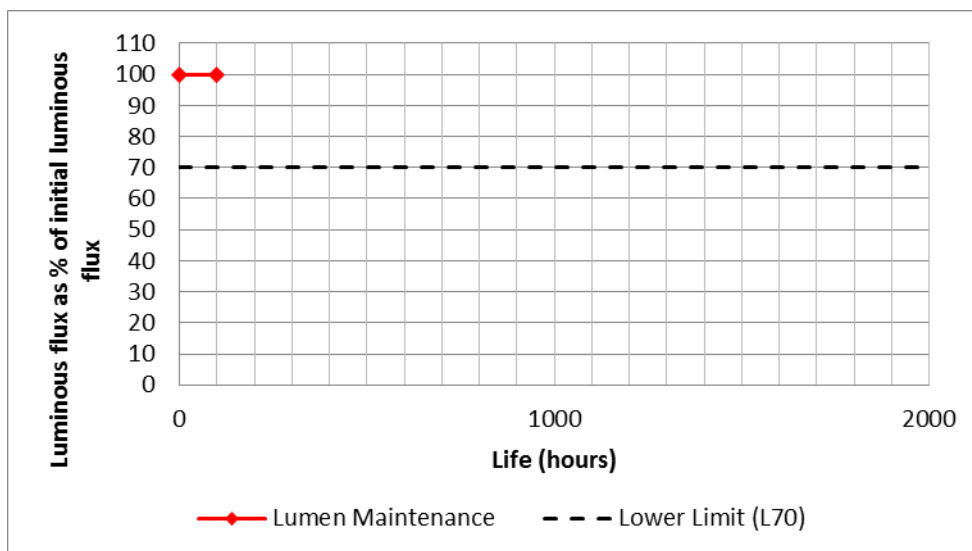

**Figure 6. Luminous flux depreciation curve for model HB-200D-CIR**

## A.2. IP65 Highbay 150W


### A.2.1. PRODUCT DETAILS

**Table A.6 Product Specifications**

Product Name	IP65 Highbay 150W
Model No.	HB-150D-CIR-V2
Product Description	LED Highbay
Nominal Dimensions	Ø – 252mm, H - 200mm
Product Supply Requirement	220-240V AC, 50/60Hz
Lamp Type and Power	LED, 150W



**Figure 7. Product Images**

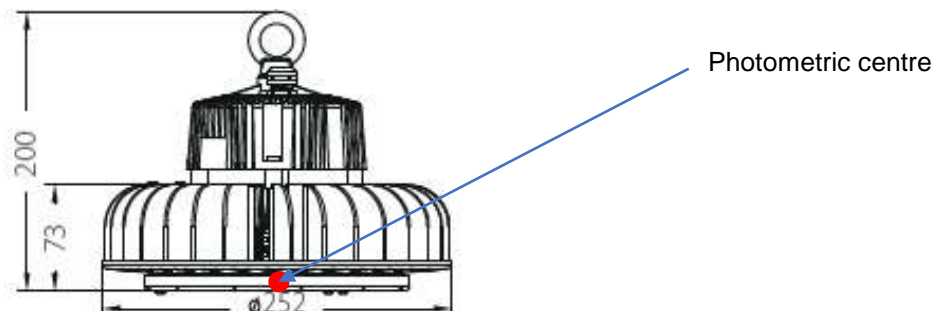

**Figure 8. Product diagram**

## A.2.2. SAFETY EVALUATION

Safety assessment was carried out in accordance with the requirements set in LIA Laboratories' technical scheme document TSD-004, the clauses verified are shown in Table 2 and have been evaluated against IEC 60598-1:2014 and IEC 60598-2-1:1979+AMD1:1987.

The product has been found to conform to the requirements laid out in the identified clauses.

**Table A.7 Safety Test Results**

Clause No.	Title
1.5	Marking
1.6	Construction
1.7	Creepage Distances and Clearances
1.8	Provision for Earthing
1.9	Terminals
1.10	External and Internal Wiring
1.11	Protection against Electric Shock
1.12	Endurance Tests and Thermal Tests
1.13	Resistance to Dust and Moisture – IP65
1.14	Insulation Resistance and Electric Strength
1.15	Resistance to Heat, Fire and Tracking

### A.2.3. CENTRE BEAM INTENSITY AND BEAM ANGLE

Table A.8 *Beam Angle value for model HB-150D-CIR-V2*

Centre Beam Intensity (cd)	Beam Angle ( <i>Lamp orientation</i> )	Beam Angle Result (°)
6885	0° - 180°	113.3
	90° - 270°	113.2

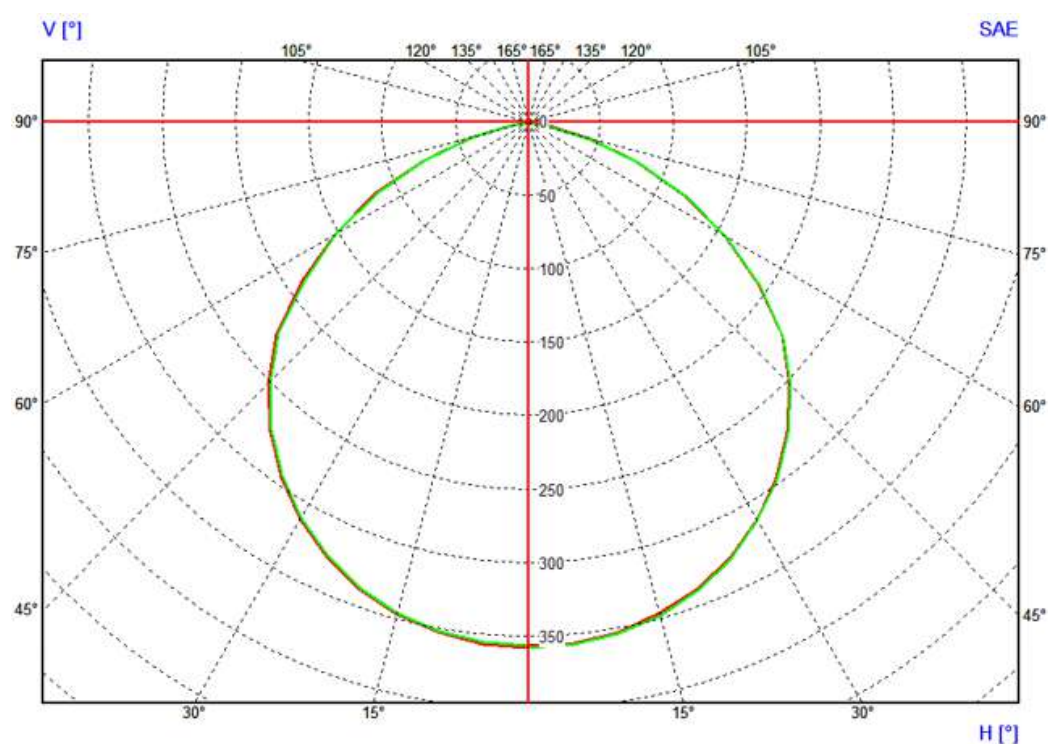


Figure 9. *Polar Diagram for model HB-150D-CIR-V2*



## A.2.4. COLORIMETRY

**Table A.9 Colorimetry values for model HB-150D-CIR-V2**

<b>COLORIMETRY &amp; LUMINOUS FLUX</b>	x coordinate	0.3255
	y coordinate	0.3395
	u' coordinate	0.2027
	v' coordinate	0.4757
	Correlated Colour Temperature (K)	5817
	Ra (%)	85
	R1 (%)	84
	R2 (%)	92
	R3 (%)	94
	R4 (%)	83
	R5 (%)	84
	R6 (%)	86
	R7 (%)	88
	R8 (%)	71
	R9 (%)	18
	R10 (%)	79
	R11 (%)	82
R12 (%)	61	
R13 (%)	87	
R14 (%)	97	
Lumen Output (lm)	19248	

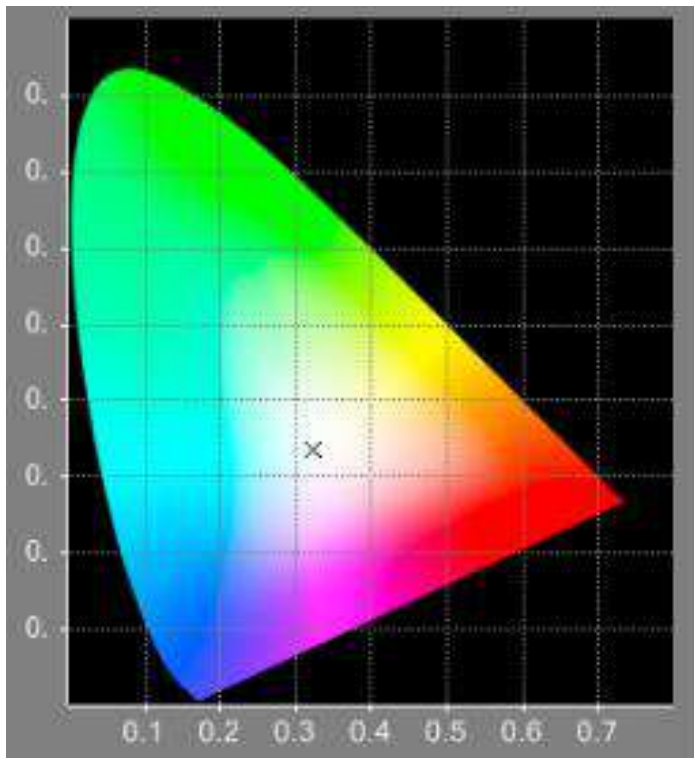


Figure 10. CIE 1931 diagram for model HB-150D-CIR-V2

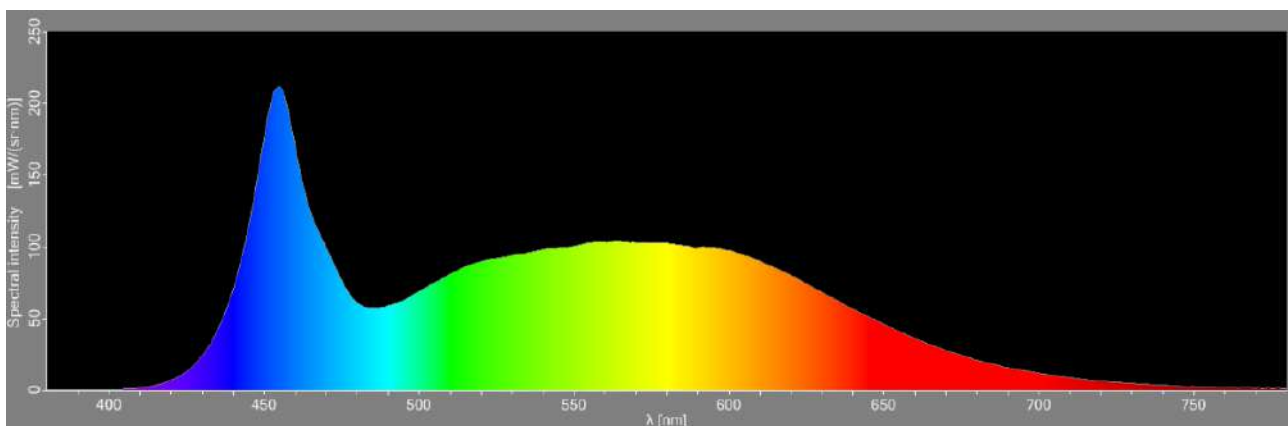


Figure 11. Spectral Flux for model HB-150D-CIR-V2





### **A.2.5. LIFE TEST**

Due to the identical construction and critical components used in this model, the life assessment was carried out as a family variant. Life testing was conducted on the IP65 Highbay 200W – Model No. HB-200D-CIR as this was considered to be the most onerous. Refer to section A.1.5 for the measured values

### A.3. IP65 Highbay 100W


#### A.3.1. PRODUCT DETAILS

**Table A.10 Product Specifications**

Product Name	IP65 Highbay 100W
Model No.	HB-100D-CIR
Product Description	LED Highbay
Nominal Dimensions	Ø – 252mm, H - 200mm
Product Supply Requirement	220-240V AC, 50/60Hz
Lamp Type and Power	LED, 100W



**Figure 12. Product Images**

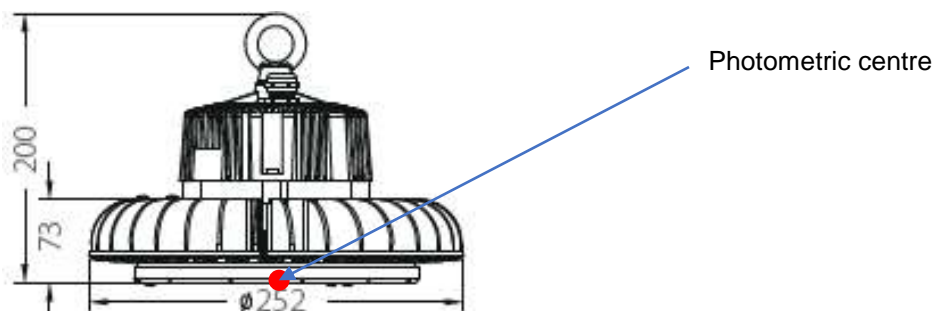

**Figure 13. Product diagram**

### A.3.2. SAFETY EVALUATION

Safety assessment was carried out in accordance with the requirements set in LIA Laboratories' technical scheme document TSD-004, the clauses verified are shown in Table 2 and have been evaluated against IEC 60598-1:2014 and IEC 60598-2-1:1979+AMD1:1987.

The product has been found to conform to the requirements laid out in the identified clauses.

**Table A.11 Safety Test Results**

Clause No.	Title
1.5	Marking
1.6	Construction
1.7	Creepage Distances and Clearances
1.8	Provision for Earthing
1.9	Terminals
1.10	External and Internal Wiring
1.11	Protection against Electric Shock
1.12	Endurance Tests and Thermal Tests
1.13	Resistance to Dust and Moisture – IP65
1.14	Insulation Resistance and Electric Strength
1.15	Resistance to Heat, Fire and Tracking

### A.3.3. CENTRE BEAM INTENSITY AND BEAM ANGLE

Table A.12 *Beam Angle value for model HB-100D-CIR*

Centre Beam Intensity (cd)	Beam Angle ( <i>Lamp orientation</i> )	Beam Angle Result (°)
4954	0° - 180°	114.4
	90° - 270°	114.6

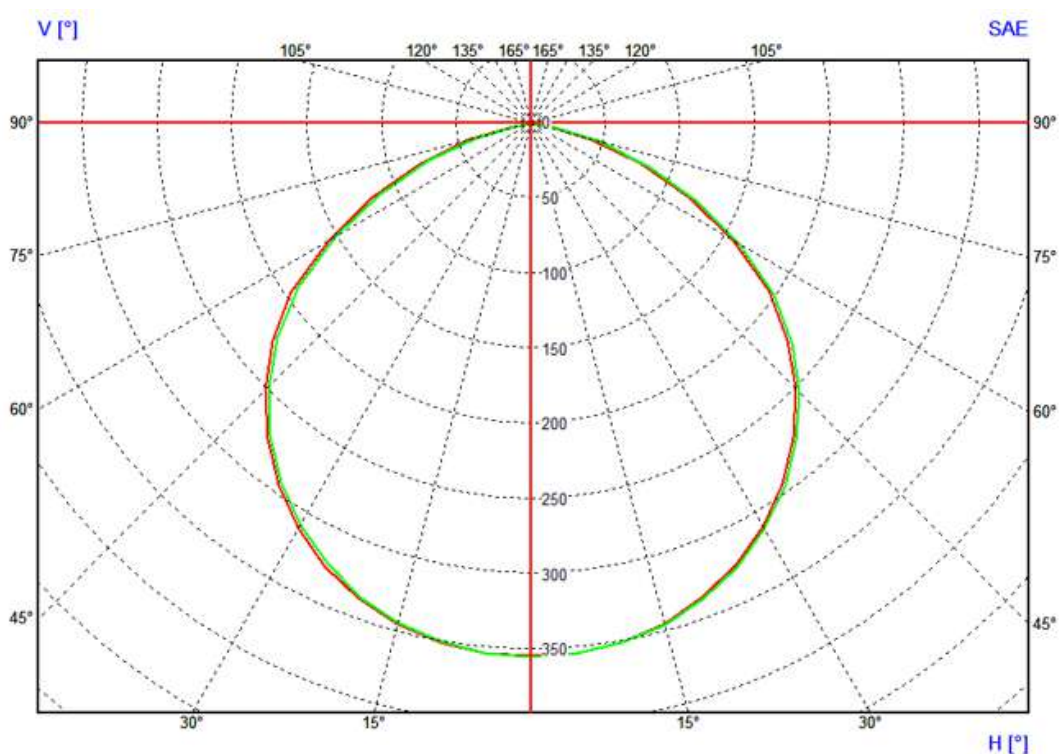


Figure 14. *Polar Diagram for model HB-100D-CIR*



### A.3.4. COLORIMETRY

Table A.13 *Colorimetry values for model HB-100D-CIR*

<b>COLORIMETRY &amp; LUMINOUS FLUX</b>	x coordinate	0.3258
	y coordinate	0.3413
	u' coordinate	0.2022
	v' coordinate	0.4767
	Correlated Colour Temperature (K)	5800
	Ra (%)	84
	R1 (%)	83
	R2 (%)	92
	R3 (%)	94
	R4 (%)	81
	R5 (%)	82
	R6 (%)	86
	R7 (%)	87
	R8 (%)	69
	R9 (%)	14
	R10 (%)	78
	R11 (%)	79
R12 (%)	58	
R13 (%)	86	
R14 (%)	97	
Lumen Output (lm)	13952	

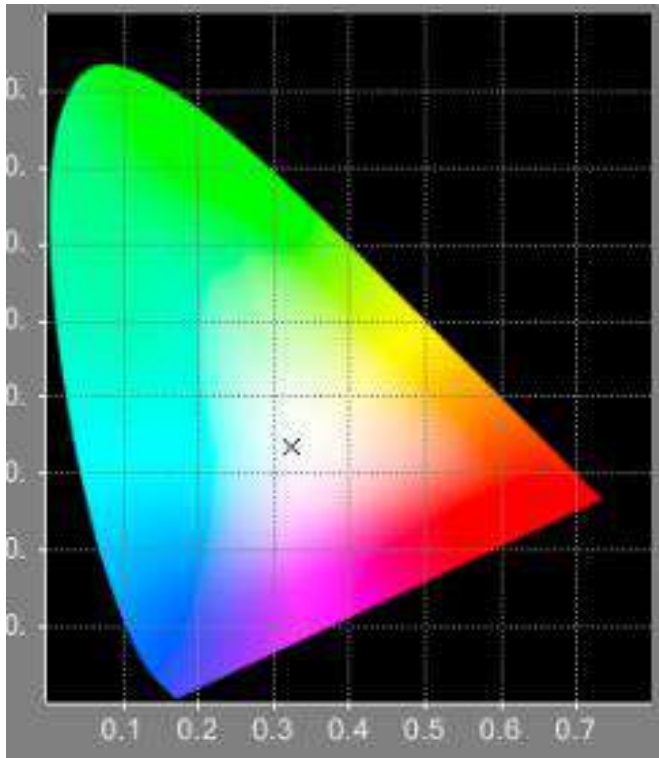


Figure 15. CIE 1931 diagram for model HB-100D-CIR

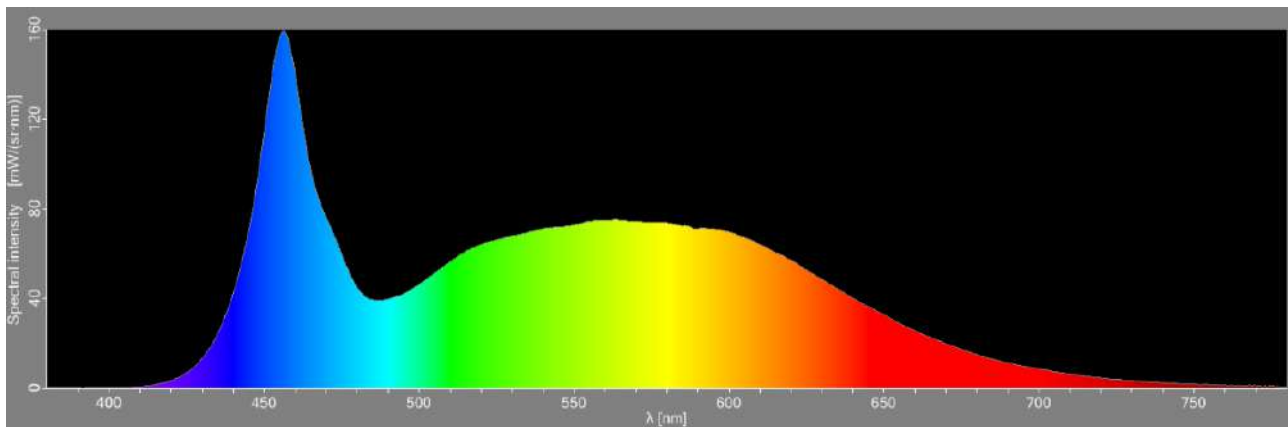


Figure 16. Spectral Flux for model HB-100D-CIR



### **A.3.5. LIFE TEST**

Due to the identical construction and critical components used in this model, the life assessment was carried out as a family variant. Life testing was conducted on the IP65 Highbay 200W – Model No. HB-200D-CIR as this was considered to be the most onerous. Refer to section A.1.5 for the measured values

---

**End**